

High Frequency Ultra-low Jitter Voltage Controlled Crystal Oscillators [Quick - turn VCXO , 15 ~ 2,100 MHz]

G_JF

CMOS / Differential

150 fsec typical Phase Jitter

SMD

1.8 V

2.5 V

3.3 V

Min.

15 MHz

Max.

2,100 MHz

Features

G_JF series (8 pads), a member of Mercury QuikXO™ quick-turn Voltage Controlled Crystal Oscillators VCXOs, features CMOS, LVPECL, LVDS, CML or HCSL output logics and Ultra-low RMS phase jitter (163 fsec for 250 MHz at 3.3V, 12 KHz to 20 MHz). Operating voltages are 1.8V, 2.5V or 3.3V. Applications include, networking, wireless infrastructure, high resolution audio and video, high-speed data converters and storage area networks.



General specifications , at Ta=+25°C

Model	GTJF	GPJF	GDJF	GCJF	GQJF
Output Logic	CMOS	PECL	LVDS	HCSL	CML
Supply Voltage V _{DD}	+ 1.8 V ± 5% + 2.5 V ± 10% + 3.3 V ± 10%	---	+ 1.8 V ± 5% (*) + 2.5 V ± 10% + 3.3 V ± 10%	+ 1.8 V ± 5% + 2.5 V ± 10% + 3.3 V ± 10%	+ 1.8 V ± 5% + 2.5 V ± 10% + 3.3 V ± 10%
Available Frequency Range	15 ~ 250 MHz	15 ~ 2,100 MHz	15 ~ 2,100 MHz	15 ~ 700 MHz	15 ~ 2,100 MHz
Output Load	15pF (max.)	50 Ω into V _{DD} - 2V or Thevenin equivalent	100 Ω between OUT and OUTN	50 Ω to GND	50 Ω to V _{DD}
Output Logic " High " , " 1 "	V _{DD} - 0.4V (min.)	V _{DD} - 1.165 V (min.) V _{DD} - 0.8 V (max.)	V _{DD} : 1.4V (typ.) V _{DD} : 1.6 V (max.)	V _{DD} : 0.66V (min.) V _{DD} : 1.15 V (max.)	V _{DD} - 0.085V (min.) V _{DD} = (max.)
Output Logic " Low " , " 0 "	V _{DD} x 0.1 (max.) 0.3V (max.) for 1.8V only	V _{DD} - 2.0 V (min.) V _{DD} - 1.55 V (max.)	V _{DD} : 1.1 V (typ.) V _{DD} : 0.9 V (min.)	V _{DD} : -0.15V (min.) V _{DD} : 0.15V (max.)	V _{DD} - 0.6V (min.) V _{DD} - 0.32V (max.)
Output Voltage Swing	---	595 mV (min.) 930 mV (max.)	250 mV (min.) 450 mV (max.)	450 mV (min.) 700 mV (typ.)	200 mV (min.) 600 mV (typ.)
Current Consumption (V _{DD} = + 3.3 V)	50MHz : 70 mA (typ.) 250MHz : 80 mA (typ.)	100 mA (typ.) 120 mA (max.)	75 mA (typ.) 90 mA (max.)	80 mA (typ.) 100 mA (max.)	70 mA (typ.) 85 mA (max.)
Current with Output Disabled	63 mA (typ.)	99 mA (typ.)	74 mA (typ.)	79 mA (typ.)	69 mA (typ.)
Rise Time / Fall Time	5.0 nsec (max.) (10% to 90% Waveform)	0.4 nsec (max.) (20% to 80% Waveform)	0.4 nsec (max.) (20% to 80% Waveform)	0.4 nsec (max.) (20% to 80% Waveform)	0.4 nsec (max.) (20% to 80% Waveform)
RMS Jitter [12 kHz ~ 20 MHz]	156.250 MHz : 159 fsec (typ.) ; 491.520 MHz : 155 fsec (typ.) ; 644.530 MHz : 151 fsec (typ.) ; 2,000 MHz : 163 fsec (typ.)				
Frequency Stability Codes	Frequency Stability over Operating Temperature Range	± 25 ppm	± 50 ppm	± 100 ppm	If non-standard , please enter the desired stability after the " C " or " I " represents . For example : " C20 " ± 20 ppm over -10°C to +70°C ; " I20 " ± 20 ppm over -40°C to +85°C
	Commercial (-10°C to +70°C)	A	B	C	
	Industrial (-40°C to +85°C)	D	E	F	
Duty Cycle	50 % ± 5% ; 50 % ± 10% for CMOS 1.8V only				
Start-up Time	5 msec. (typ.) ; 10 msec. (max.)				
Aging at Ta = +25°C	± 3 ppm (max.) for first year ; ± 2 ppm (max.) per year thereafter				
Storage Temperature	-55°C to + 150°C				
Control Voltage Function on Pad 1					
Vcontrol Center	+ 0.9 V for V _{DD} = + 1.8 V	+ 1.25 V for V _{DD} = + 2.5 V		+ 1.65 V for V _{DD} = + 3.3 V	
Vcontrol Range	+ 0.0V ~ +1.8V	+ 0.25V ~ +2.25V		+ 0.3V ~ +3.0V	
Frequency Pulling Range	± 100 ppm (min.) ± 200 ppm (available)	± 100 ppm (min.) ± 200 ppm (available)		± 100 ppm (min.) ± 200 ppm (available)	
Linearity	± 1% (typ.) ; ±10% (max.)				
Transfer Function	Positive Transfer				
Input Impedance	5 MΩ (min.)				
Bandwidth	10 KHz (typ.) Measured at -3 dB				
Output Enable Function on Pad 2					
Output Enable / Disable Function	80% of V _{DD} (min.) to enable output. 20% of V _{DD} (max.) to disable output.				
Output Enable Time / Disable Time	2.5 msec (max.) / 10 usec (max.)				

G_JF

CMOS / Differential

150 fsec typical Phase Jitter

SMD

1.8 V

2.5 V

3.3 V

Min.

15 MHz

Max.

2,100 MHz

Part Number Format and Example

Example : 3GPJF578-E-150N-644.530

3	G	P	JF578	-	E	-	150N	-	644.530
Supply Voltage Code : "3" for 3.3V "25" for 2.5V "18" for 1.8V	"G" : for Voltage Controlled Crystal Oscillators	Output Code : "T" : COMS "P" : PECL "D" : LVDS "C" : HCSL "Q" : CML	"JF" : Product Series "578" : Package Code 7.0 * 5.0 _ 8 Pad "538" : Package Code 5.0 * 3.2 _ 8 Pad	-	Freq. Stability Code : "E" : ±50 ppm over -40 to +85 C Other frequency stabilities are available.	-	Freq. Pulling Range : "150" : ±150ppm "M" : Maximum "N" : Minimum "T" : Typical	-	Frequency (MHz)


Outline Dimensions (Unit : mm) , Suggested pad Layout for SMDs

G_JF538	G_JF578
<p>Pad Connections : Pad 1 : VC Pad 5 : Complementary Output Pad 2 : OE Pad 6 : Supply Voltage Pad 3 : Ground Pad 7 : Do not connect Pad 4 : Output Pad 8 : Do not connect</p>	<p>Pad Connections : Pad 1 : VC Pad 5 : Complementary Output Pad 2 : OE Pad 6 : Supply Voltage Pad 3 : Ground Pad 7 : Do not connect Pad 4 : Output Pad 8 : Do not connect</p>
CMOS Test Circuits	HCSL Test Circuits
CML Test Circuits	LVPECL Test Circuits
	<p>$V_{DD} = 3.3V; R1 = R3 = 127 \Omega; R2 = R4 = 82.5 \Omega$ $V_{DD} = 2.5V; R1 = R3 = 250 \Omega; R2 = R4 = 62.5 \Omega$</p>
LVDS Test Circuits for 2.5V and 3.3V	LVDS Test Circuits for 1.8V only (*)

Emboss Taping and Reel Specifications

[VCXO]

[(VC)TCXO]

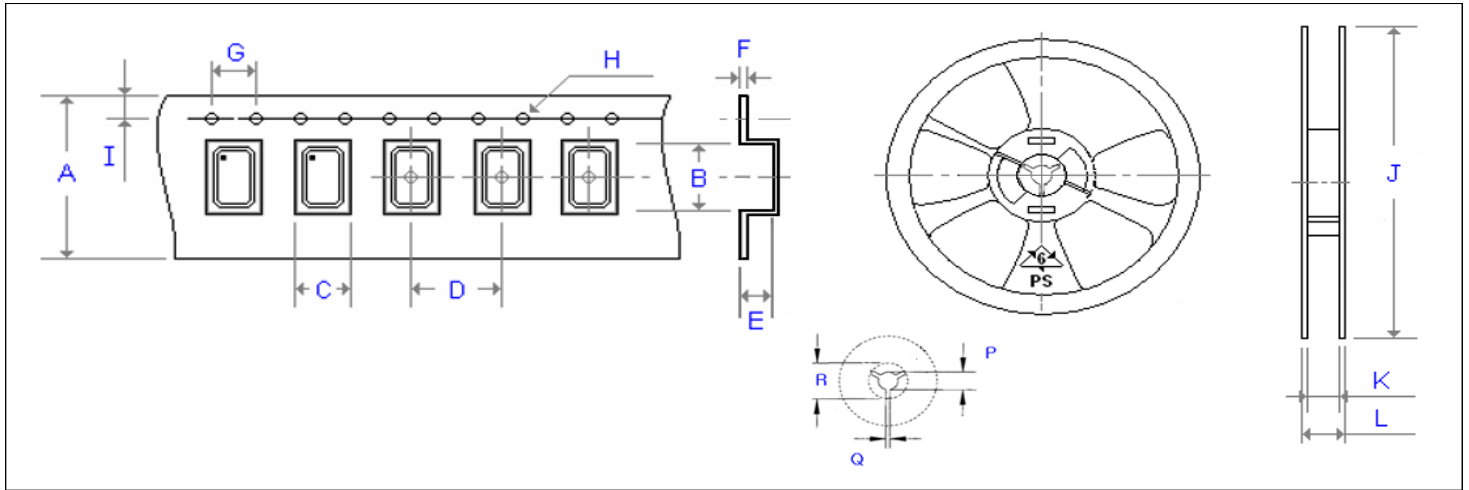

Carrier Type Dimensions (unit : mm) ±0.3mm

	A	B	C	D	E	F	G	H	I	pcs / reel
G_226	8.00	2.80	2.25	4.00	1.10	0.30	4.00	∅ 1.50	1.75	3000
G_326	8.00	3.40	2.70	4.00	1.40	0.25	4.00	∅ 1.50	1.75	3000
G_534	12.00	5.30	3.60	8.00	1.40	0.30	4.00	∅ 1.50	1.75	1000
G_576	16.00	7.30	5.30	8.00	1.90	0.32	4.00	∅ 1.50	1.75	1000
G_43	24.00	11.80	10.00	16.00	5.00	0.30	4.00	∅ 1.50	1.75	500
G_63	24.00	11.80	10.00	16.00	5.00	0.30	4.00	∅ 1.50	1.75	500
G_JF538	12.00	5.30	3.60	8.00	1.40	0.30	4.00	∅ 1.50	1.75	1000
G_JF578	16.00	7.30	5.30	8.00	1.90	0.32	4.00	∅ 1.50	1.75	1000
(V)M21	8.00	2.30	1.90	4.00	0.90	0.25	4.00	∅ 1.50	1.75	3000
(V)ME21	8.00	2.30	1.50	4.00	1.35	0.25	4.00	∅ 1.50	1.75	3000
(V)M22	8.00	2.80	2.25	4.00	1.10	0.30	4.00	∅ 1.50	1.75	3000
(V)M_32	8.00	3.71	2.80	4.00	1.75	0.25	4.00	∅ 1.50	1.75	3000
(V)MQ_326	12.00	3.60	2.90	4.00	1.70	0.30	4.00	∅ 1.50	1.75	3000
(V)M_53	12.00	5.30	3.60	8.00	1.40	0.30	4.00	∅ 1.50	1.75	1000
(V)M_57(2)	16.00	7.40	5.50	8.00	2.80	0.35	4.00	∅ 1.50	1.75	500
(V)M_43 (63)	24.00	11.80	10.00	16.00	5.00	0.30	4.00	∅ 1.50	1.75	500

Reel Dimensions (unit : mm) ±2mm

	J	K	L	P	Q	R	pcs / reel
G_226	180.00	8.40	11.40	13.00	2.50	20.20	3000
G_326	180.00	9.00	12.00	13.00	2.50	20.20	3000
G_534	180.00	13.00	16.00	13.00	2.50	20.20	1000
G_576	180.00	17.20	19.30	13.00	2.50	20.20	1000
G_43	330.00	24.50	29.10	13.00	2.50	20.20	500
G_63	330.00	24.50	29.10	13.00	2.50	20.20	500
G_JF538	180.00	13.00	16.00	13.00	2.50	20.20	1000
G_JF578	180.00	17.20	19.30	13.00	2.50	20.20	1000
(V)M21	180.00	8.40	11.40	13.00	2.50	20.20	3000
(V)ME21	180.00	9.00	12.00	13.00	2.50	20.20	3000
(V)M22	180.00	8.40	11.40	13.00	2.50	20.20	3000
(V)M_32	180.00	9.00	11.40	13.00	2.50	20.20	3000
(V)MQ_326	180.00	13.00	16.00	13.00	2.50	20.20	3000
(V)M_53	180.00	13.00	16.00	13.00	2.50	20.20	1000
(V)M_57(2)	180.00	17.20	19.30	13.00	2.50	20.20	500
(V)M_43 (63)	330.00	24.50	29.10	13.00	2.50	20.20	500

Mercury www.mercury-crystal.com ■Taiwan : Tel: (+886)-2-2406-2779 / sales-tw@mercury-crystal.com

■USA : Tel: (+1)-909-466-0427 / sales-us@mercury-crystal.com ■China : Tel: (+86)-512-5763-8100 / sales-cn@mercury-crystal.com