


QMQF574T and **QVMQF574T** are quick-turn delivery versions of the MQF574 (a TCXO) and VMQF574 (a VCTCXO) series, respectively. quick-turn delivery products, either standard or custom frequencies are produced and shipped from Taiwan in 10 days and available at Mercury eCommerce.

They are 7.0x5.0x2.5 mm SMD, the supply voltage can be either 2.5 V or 3.3 V, CMOS output logics and frequency up to 250 MHz. The 0.8 ~ 1.6 ps typical phase jitter and lower current consumption (25 mA typical for 250 MHz at 3.3 V) compared to competitions make the series ideal for multimedia, Ethernet, and networking applications.

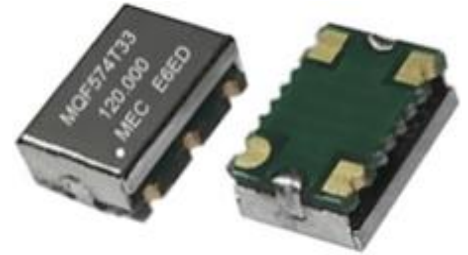

Relevant Categories:

- For lower cost with regular lead time, please refer to the non- quick-turn delivery equivalent the **MQF574T** and the **VMQF574T** series
- For lower phase noise and phase jitter (0.6 p. sec. typical), please refer to **MQN574T** and **VMQN574T** series.
- For smaller footprint, 3.2 x 2.5 x 1.6 mm 6-pad SMD, with the same electrical performance, please refer to the **MQF326T**, and the **VMQF326T** series.

General Specifications: at Ta= +25°C

| Output Logic Type | CMOS (code "T") | |
|--------------------------------------|---|---|
| TCXO Models | QMQF574T25 | QMQF574T33 |
| VCTCXO Models | QVMQF574T25 | QVMQF574T33 |
| Frequency Range | 10 ~ 250 MHz | 10 ~ 250 MHz |
| Supply Voltage (V _{DD}) | +2.5 V ±5% Code "25" | +3.3 V ±5% Code "33" |
| Current Consumption; typical | 25 MHz: 17 mA 45 MHz: 20 mA 50 MHz: 21 mA 125 MHz: 24 mA 250 MHz: 25 mA | 10 MHz: 21 mA 50 MHz: 24 mA 77 MHz: 25 mA 125 MHz: 29 mA 250 MHz: 34 mA |
| Load; typical | 15 pF | |
| Output High Voltage; V _{OH} | 90% V _{DD} min. | |
| Output Low Voltage; V _{OL} | 10% V _{DD} max. | |
| Rise / Fall Time (Tr; Tf) | 1.5 nS. Typ.; 3.0 nS. max. (10% ↔ 90% waveform) | |
| Frequency Stability vs | Operating Temperature | ±2.0 ppm over -40 to +85°C. Spec. code: "2.0A". |
| | | ±2.5 ppm over -30 to +85°C. Spec. code: "2.5B". |
| | | Custom specification: The 2.0A or 2.5B is replaced with a control number assigned by Mercury. |
| | Voltage Change | ±0.2 ppm max. for a ±5% input voltage change |
| Load Change | ±0.2 ppm max. for a ±10% load condition change | |

MERCURY www.mercury-crystal.com

Taiwan: TEL(886)-2-2406-2779, e-mail: sales-tw@mercury-crystal.com

| | | | | | | | | |
|---|--|--|-----------|---------------|-----------|-----------|----------------|------|
| | Aging at Ta = +25°C | ±2 ppm max. first-year; ±10 ppm max. over 10 years | | | | | | |
| | Reflow | ±1.0 ppm max., one reflow and measured 24 hours afterward. | | | | | | |
| Initial Calibration Tolerance (Initial Frequency Accuracy) | ±1.0 ppm typical; ±2.0 ppm. max. at +25°C±2°C. | | | | | | | |
| Duty Cycle | 50% ±5%. At 50% V _{DD} . | | | | | | | |
| Current with Output Disabled | 18 mA typical | | | | | | | |
| Start-up Time | 5 m. sec. max. | | | | | | | |
| Output Enable Time | 200 ns max. | | | | | | | |
| Output Disable Time | 50 ns max. | | | | | | | |
| Single Side-band Phase Noise (dBc / Hz; typical) | Frequency (MHz) | 16 | 25 | 49.152 | 50 | 54 | 156.250 | |
| | Supply Voltage | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | 3.3 | |
| | Offset | 10 Hz | -92 | -88 | -85 | -80 | -77 | -63 |
| | | 100 Hz | -116 | -109 | -108 | -103 | -106 | -91 |
| | | 1 kHz | -131 | -125 | -121 | -117 | -119 | -109 |
| | | 10 kHz | -139 | -132 | -126 | -124 | -125 | -115 |
| | | 100 kHz | -140 | -134 | -127 | -127 | -126 | -116 |
| | | 1 MHz | -158 | -151 | -146 | -145 | -145 | -137 |
| | | 5 MHz | -163 | -157 | -154 | -148 | -153 | -147 |
| | | 10 MHz | - | - | -157 | -150 | -157 | -150 |
| 20 MHz | - | - | -160 | -152 | -160 | -155 | | |
| Integrated Phase Jitter, RMS 12 kHz to 20 MHz; picosecond | | 0.76 | 0.9 | 1.0 | 1.1 | 1.1 | 1.1 | |
| Control Voltage Function on Pad 1 (VCTXOs only) | | | | | | | | |
| Control Voltage (V_{control}) | V _{control} center and range: +1.5 V ± 1.0 V. For both 2.5 V _{DD} and 3.3 V _{DD} | | | | | | | |
| Frequency Pulling Range | High pull: +8 ppm min. for V _{control} from 1.5 V to +2.5V Low pull: -8 ppm min. for V _{control} from 0.5 V to +1.5V | | | | | | | |
| Linearity | ±5% typical. ±10% max. | | | | | | | |
| Transfer Function | Positive Transfer | | | | | | | |
| Input Impedance | 500 KΩ min. | | | | | | | |
| Bandwidth | 10 kHz min. Measured at -3 dB. | | | | | | | |
| Tri-State function on Pad 2 | | | | | | | | |
| Output Enable (OE) Control | 70% of V _{DD} (min.) to enable output. CMOS level. Do not leave this pin floating. If no connection is desired, please contact Mercury. | | | | | | | |
| | 30% of V _{DD} (max.) to disable the output. Output is high impedance. | | | | | | | |
| Output Enable Time | 200 n. sec. max. | | | | | | | |
| Output Disable Time | 50 n. sec. max. | | | | | | | |

Absolute Maximum Rating:

| | |
|--------------------------------------|---|
| Input Voltage | -0.5 V to $V_{DD} + 0.5$ V |
| Output Voltage | -0.5 V to $V_{DD} + 0.5$ V |
| Positive Supply Voltage | 4.2 V |
| Electrostatic Discharge (ESD) | Human Body Model (HBM): Exceeds 2000 V. Class 2 per MIL-STD-1686C |
| | Machine Model (MM): Exceeds 120 V. Class M2 per MIL-STD-1686C. Note: Power, ground, and outputs are 200 V. |
| | Charged-Device Model (CDM): Exceeds 2000 V. Class C6 per MIL-STD-1686C |

Environmental Performance Specifications

| | |
|-----------------------------------|--|
| Green Requirement | RoHS compliant, Pb (lead) free per EU Directive 2002/95/EC 6/6 (2002/95/EC) and WEEE (2002/96/EC). Free of halide, cadmium, hexavalent chromium, lead, mercury, PBB's, and PBDE's. |
| Moisture Sensitivity Level | Level 1 (infinite) according to IPC/JEDEC J-STD-020D.1 |
| Storage temperature range | -55 to +125°C |
| Humidity | 85% RH, 85°C, 168 hours |
| Fine Leak / Gross Leak | MIL-Std-883, method 1014, condition A / MIL-Std-883, method 1014, condition C |
| Solderability | MIL-STD-202F method 210E |
| Reflow | 260°C for 40 sec(MAX). 1X. |
| Vibration | MIL-STD-883F:2007.3, 20G, 20 to 2000 Hz |
| Shock | MIL-STD-883F:2002.4, 1500G for 0.5mS , 3cycles |
| Resistance to Solvent | MIL-STD-202, method 215 |
| Temperature Cycling | MIL-STD-883F-1010.8 Condition B |
| Pad Surface Finish | Gold (0.3 um to 1.0 um) over nickel (1.27 um to 8.89 um) |

Part Number Format and Examples:


Example 1: QVMQF574T33-2.0A-125.000;

Example 2: QMQF574T25-2.5B-148.500;


Example 3: QMQF574T33-xxxx-155.520

| | | | | | | | |
|---|---|---------------------------|--|---|--|---|---|
| QVMQF | 574 | T | 33 | - | 2.0A | - | 125.000 |
| QMQF | 574 | T | 25 | - | 2.5B | - | 148.500 |
| QMQF | 574 | T | 33 | - | xxxxx | - | 155.520 |
| Product Series "QMQF": TCXO "QVMQF": VCTCXO | Package Code "574": 7.0x5.0x2.5 mm 4-pad SMD | Output Logic "T": CMOS | Supply Voltage "33" for 3.3V "25" for 2.5V | - | "2.5B": The freq. stability is ± 2.5 ppm over -30 to +85°C "2.0A": The freq. stability is ± 2.0 ppm over -40 to +85°C "xxxxx": Custom frequency stability. A control number assigned by Mercury. | - | The nominal Frequency in MHz. 3 places or more after the decimal. |

Output OE Function on pad 2 Note: Do not leave this pad floating. If “no-connection” is desired, please contact Mercury.

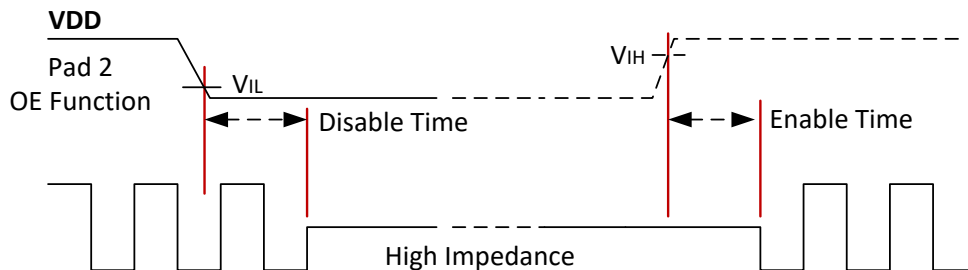


Phase Noise Plot of QMQF574T33-89.376 MHz, VDD = +3.3V, CMOS

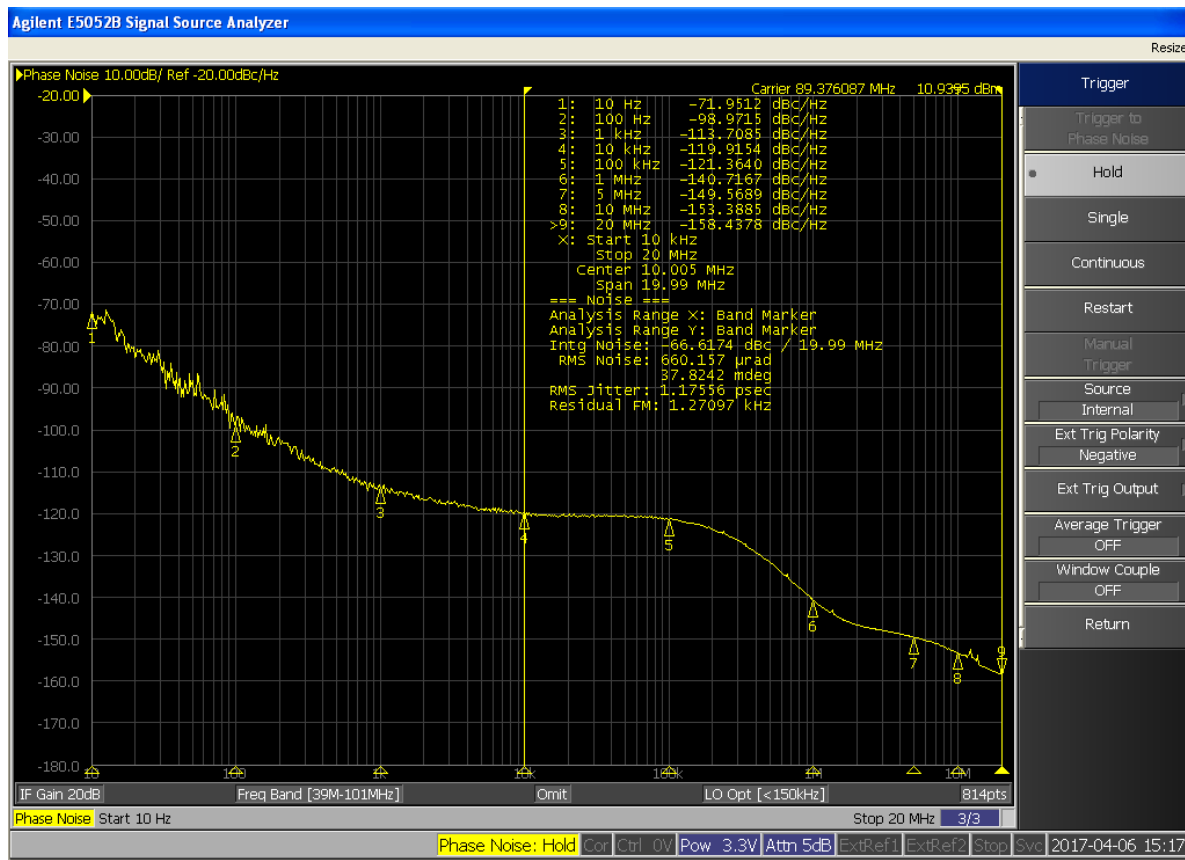


Test Circuits and Output Waveforms

Duty cycle = $\left(\frac{T1}{T2}\right) * 100\%$. Measured at 50% VDD

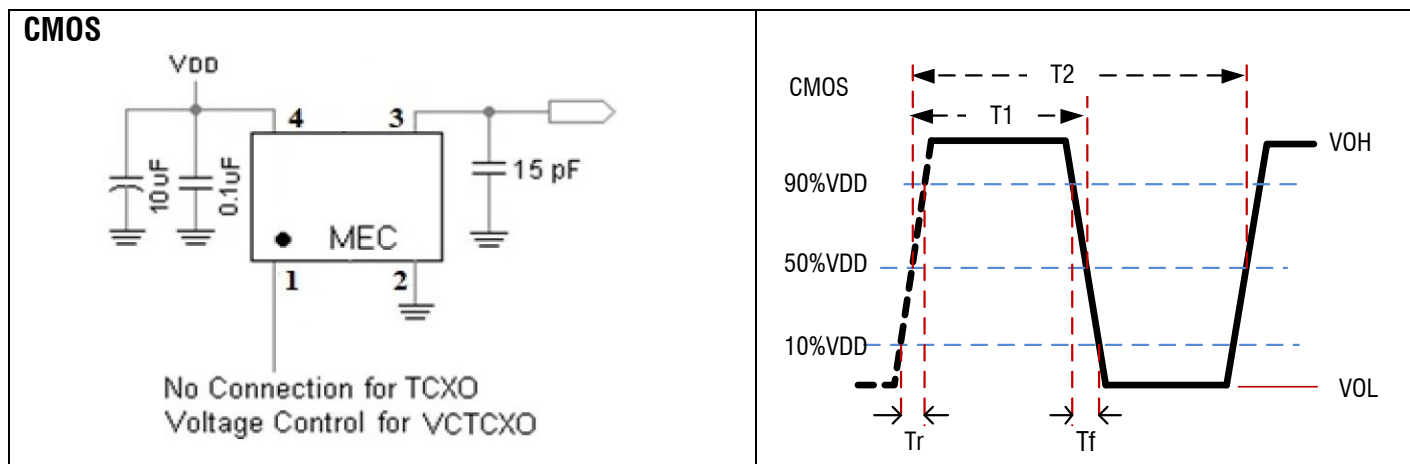


Package Dimensions and Recommended Solder Pad Layout

unit: (mm)

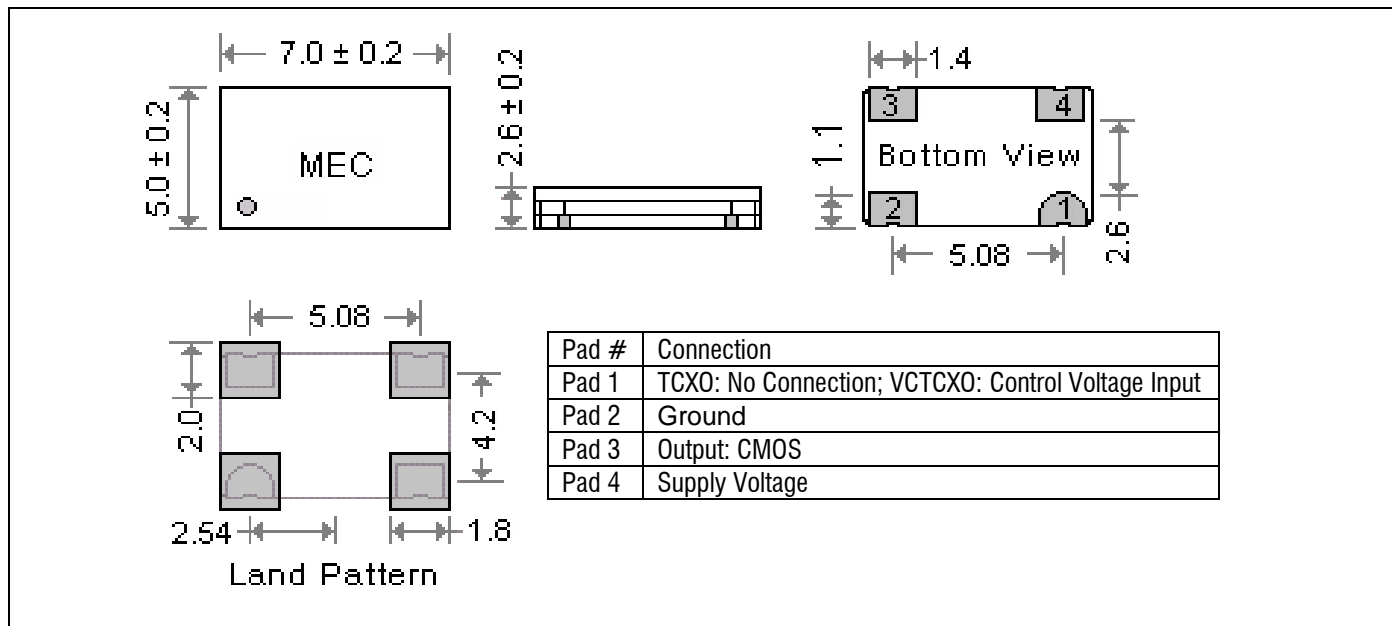

Recommended Solder Reflow Profile (per IPC/JEDEC J-STD-020D.1)

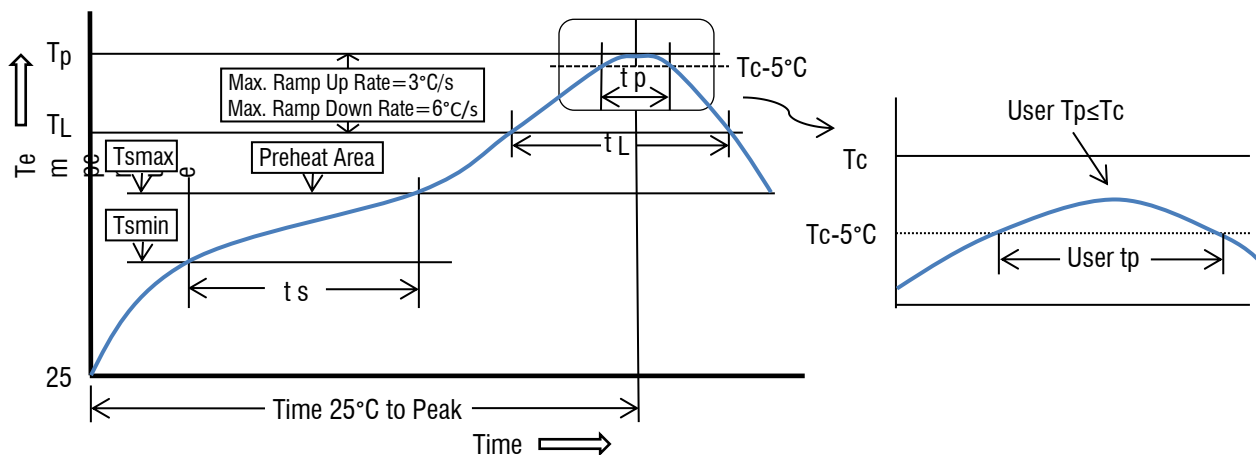

| Profile Feature | Sn-Pb Eutectic Assembly | Pb-free Assembly |
|--|-------------------------|-------------------|
| Preheat/Soak | | |
| - Temperature min. (Ts min.) | 100°C | 150°C |
| - Temperature max. (Ts max.) | 150°C | 200°C |
| - Time (ts) (Ts min. to Ts max.) | 60 to 120 seconds | 60 to 180 seconds |
| Ramp-up rate (T _L to T _p) | 3°C / sec. max. | 3°C / sec. max. |
| Liquidous temperature (T _L) | 183°C | 217°C |
| Time (t _L) maintained above T _L | 60 to 150 seconds | 60 to 150 seconds |
| Peak package body temperature (T _p) | 235°C | 260°C |
| Time (T _p) within 5°C of the classification temperature T _c | 10 to 30 seconds | 20 to 40 seconds |
| Ramp-down rate (T _p to T _L) | 6°C / second max. | 6°C / second max. |
| Time 25°C to peak temperature | 6 minutes max. | 8 minutes max. |

All temperatures refer to the topside of the package, measured on the package body surface.