


QMQF576 Series Temperature Compensated Crystal Oscillators (TCXOs)
QVMQF576 Series TCXOs with Voltage Control Function (VCTCXOs)



MERCURY
Since 1973

QMQF576 and **QVMQF576** are quick-turn delivery versions of the MQF576 (a TCXO) and VMQF576 (a VCTCXO) series, respectively. quick-turn delivery products, either standard or custom frequencies are produced and shipped from Taiwan in 10 days and available at Mercury eCommerce. They are 7.0x5.0x2.5 mm SMD, the supply voltage can be either 2.5 V or 3.3 V and output logics include differential LVPECL or LVDS (up to 1.5 GHz). The 0.8 ~ 1.6 ps typical phase jitter and lower current consumption (43 mA typical for LVPECL 622.080 MHz at 3.3 V) compared to competitions make the series ideal for multimedia, Ethernet, and networking applications.

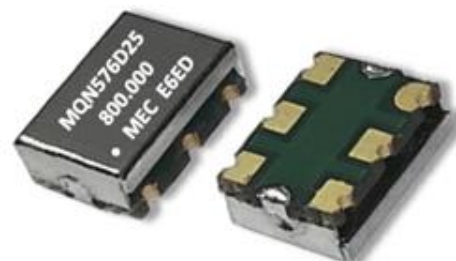

Relevant Categories:

- For lower cost with regular lead time, please refer to the non- quick-turn delivery equivalent the **MQF576** and the **VMQF576** series
- For lower phase noise and phase jitter (0.6 p. sec. typical), please refer to the **MQN576** and **VMQN576** series.
- For smaller footprint, 3.2 x 2.5 x 1.6 mm 6-pad SMD, with the same electrical performance, please refer to the **MQF326**, and the **VMQF326** series.

General Specifications: at Ta= +25°C

Output Logic Type	LVPECL (code "P")		LVDS (code "D")	
TCXO Models	QMQF576P25	QMQF576P33	QMQF576D25	QMQF576D33
VCTCXO Models	QVMQF576P25	QVMQF576P33	QVMQF576D25	QVMQF576D33
Frequency Range	10 ~ 1500 MHz		10 ~ 1500 MHz	
Supply Voltage (V _{DD})	+2.5 V ±5%	+3.3 V ±5%	+2.5 V ±5%	+3.3 V ±5%
	Code " 25 "	Code " 33 "	Code " 25 "	Code " 33 "
Current Consumption (mA; typical)	18 MHz: 28 156 MHz: 30 622 MHz: 33 1289 MHz: 37 1500 MHz: 43	18 MHz: 35 156 MHz: 38 622 MHz: 43 1289 MHz: 51 1500 MHz: 52	11 MHz: 19 190 MHz: 23 390 MHz: 24 1289 MHz: 31 1500 MHz: 34	11 MHz: 22 155.5 MHz: 26 250 MHz: 26 1080 MHz: 32 1500 MHz: 35
Load; typical	50 Ω into Vcc - 2.0 V or Thevenin equivalent		100 Ω across the outputs	
Output "High" Voltage; (V _{OH})	V _{DD} -1.03 V min.; V _{DD} -0.6 V max.		1.4 V typical; 1.6 V max.	
Output "Low" Voltage; V _{OL}	V _{DD} -1.85 V min.; V _{DD} -1.6 V max		1.1 V typical; 0.9 V min.	
Rise Time (Tr) / Fall Time (Tf)	0.2 nS Typ.; 0.5 nS max. (20% ↔ 80% waveform)		0.2 nS Typ.; 0.4 nS max. (20% ↔ 80% waveform)	

MERCURY www.mercury-crystal.com

Taiwan: TEL(886)-2-2406-2779, e-mail: sales-tw@mercury-crystal.com

Additional Output AC Characteristics for LVDS output (LVDS only)	Differential Output Voltage (V _{OD}): 175 mV min.; 350 mV typical V _{OD} Magnitude Change (ΔV _{OD}): 50 mV max. Offset Voltage (V _{OS}): 1.25 V typical V _{OS} Magnitude Change (ΔV _{OS}): 50 mV max.											
Frequency Stability vs	Operating Temperature	±2.0 ppm over -40 to +85°C. Spec. code: “ 2.0A ”.										
		±2.5 ppm over -30 to +85°C. Spec. code: “ 2.5B ”.										
		Custom specification: The code is replaced with a control number assigned by Mercury										
	Voltage Change	±0.2 ppm max. for a ±5% input voltage change										
	Load Change	±0.2 ppm max. for a ±10% load condition change										
	Aging at Ta = +25°C	±2 ppm max. first-year; ±10 ppm max. over 10 years										
	Reflow	±1.0 ppm max., one reflow and measured 24 hours afterward.										
Initial Calibration Tolerance (Initial Frequency Accuracy)	±1.0 ppm typical; ±2.0 ppm. max. at +25°C±2°C.											
Duty Cycle	50% ±5%. At 50% V _{DD} .											
Current with Output Disabled	18 mA typical											
Start-up Time	5 m. sec. max.											
Output Enable Time	200 ns max.			Output Disable Time				50 ns max.				
Single Side-band Phase Noise (dBc/Hz; typical)	Frequency (MHz)	25	49.152	50	100	156.250	600	1030	1080	1270	1450	
	Supply Voltage	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	
	Output Logic	P	D	D	D	P	P	P	D	D	D	
	Offset	10 Hz	-61	-85	-80	-73	-63	-59	-53	-49	-49	-52
		100 Hz	-106	-108	-103	-96	-91	-81	-75	-81	-78	-78
		1 kHz	-125	-121	-117	-109	-109	-96	-93	-93	-91	-89
		10 kHz	-132	-126	-124	-119	-115	-102	-94	-98	-94	-92
		100 kHz	-133	-127	-127	-120	-116	-104	-97	-99	-97	-94
		1 MHz	-151	-146	-145	-138	-137	-125	-119	-120	-117	-118
		5 MHz	-153	-154	-148	-143	-147	-132	-129	-128	-128	-129
10 MHz		–	-157	-150	-145	-150	-136	-133	-133	-133	-133	
20 MHz	–	-160	-152	-144	-155	-139	–	-142	-142	–		
Integrated Phase Jitter, RMS 12 kHz to 20 MHz; picosecond		1.0	1.0	1.1	1.3	1.1	1.1	1.4	1.1	1.2	1.4	
Control Voltage Function on Pad 1 (VCTCXOs only)												
Control Voltage (V _{control})	V _{control} center and range: +1.5 V ± 1.0 V. For both 2.5 V _{DD} and 3.3 V _{DD}											
Frequency Pulling Range	High pull: +8 ppm min. for V _{control} from 1.5 V to +2.5V Low pull: - 8 ppm min. for V _{control} from 0.5 V to +1.5V											
Linearity	±5% typical. ±10% max.											
Transfer Function	Positive Transfer											
Input Impedance	500 KΩ min.											
Bandwidth	10 kHz min. Measured at -3 dB.											
Tri-State function on Pad 2												
Output Enable (OE) Control	70% of V _{DD} (min.) to enable output. CMOS level. Do not leave this pin floating. If no connection is desired, please contact Mercury.											
	30% of V _{DD} (max.) to disable the output. Output is high impedance.											
Output Enable Time	200 n. sec. max.											
Output Disable Time	50 n. sec. max.											

Absolute Maximum Rating:

Input Voltage	-0.5 V to $V_{DD} + 0.5$ V
Output Voltage	-0.5 V to $V_{DD} + 0.5$ V
Positive Supply Voltage	4.2 V
Electrostatic Discharge (ESD)	Human Body Model (HBM): Exceeds 2000 V. Class 2 per MIL-STD-1686C
	Machine Model (MM): Exceeds 120 V. Class M2 per MIL-STD-1686C. Note: Power, ground, and outputs are 200 V.
	Charged-Device Model (CDM): Exceeds 2000 V. Class C6 per MIL-STD-1686C

Environmental Performance Specifications

Green Requirement	RoHS compliant, Pb (lead) free per EU Directive 2002/95/EC 6/6 (2002/95/EC) and WEEE (2002/96/EC). Free of halide, cadmium, hexavalent chromium, lead, mercury, PBB's, and PBDE's.
Moisture Sensitivity Level	Level 2 per IPC/JEDEC J-STD-020D.1
Storage temperature range	-55 to +125°C
Humidity	85% RH, 85°C, 48 hours
Fine Leak / Gross Leak	MIL-Std-883, method 1014, condition A / MIL-Std-883, method 1014, condition C
Solderability	MIL-STD-202F method 208E
Reflow	260°C for 10 sec. 2X.
Vibration	MIL-STD-202F method 204, 35G, 50 to 2000 Hz
Shock	MIL-STD-202F method 213B, test condition. E, 1000GG ½ sine wave
Resistance to Solvent	MIL-STD-202, method 215
Temperature Cycling	MIL-STD-883, method 1010
Pad Surface Finish	Gold (0.3 um to 1.0 um) over nickel (1.27 um to 8.89 um)


Part Number Format and Examples:

Example 1: QVMQF576D33-2.0A-125.000;
Example 3: QMQF576P33-xxxx-156.253125


Example 2: QMQF576P25-2.5B-148.500;

QVMQF	576	D	33	-	2.0A	-	125.000
QMQF	576	P	25	-	2.5B	-	148.500
QMQF	576	P	33	-	xxxxx	-	156.253125
Product Series "QMQF": TCXO "QVMQF": VCTCXO	Package Code "576": 7.0x5.0 mm 6-pad SMD	Output Logic "P": LVPECL "D": LVDS	Supply Voltage "33" for 3.3V "25" for 2.5V	-	"2.5B": The freq. stability is ± 2.5 ppm over -30 to +85°C "2.0A": The freq. stability is ± 2.0 ppm over -40 to +85°C "xxxxx": A control number assigned by Mercury for custom frequency stability	-	The nominal Frequency in MHz. 3 places minimum after the decimal point.

Output OE Function on pad 2 Note: Do not leave this pad floating. If “no-connection” is desired, please contact Mercury.

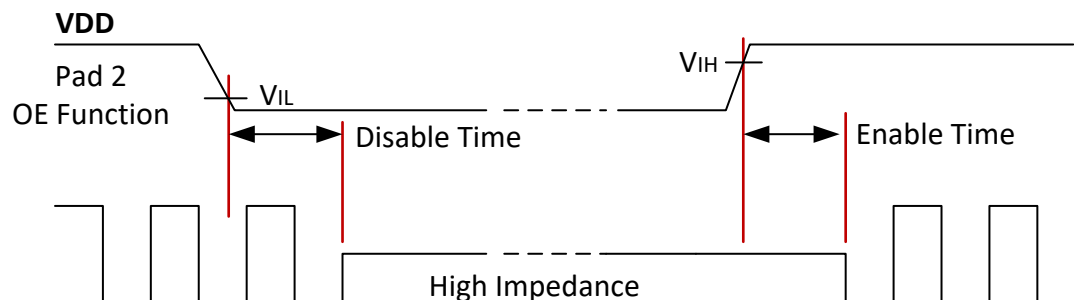


Phase Noise Plot of QMQF576P33-156.250 MHz, $V_{DD} = +3.3V$, LVPECL

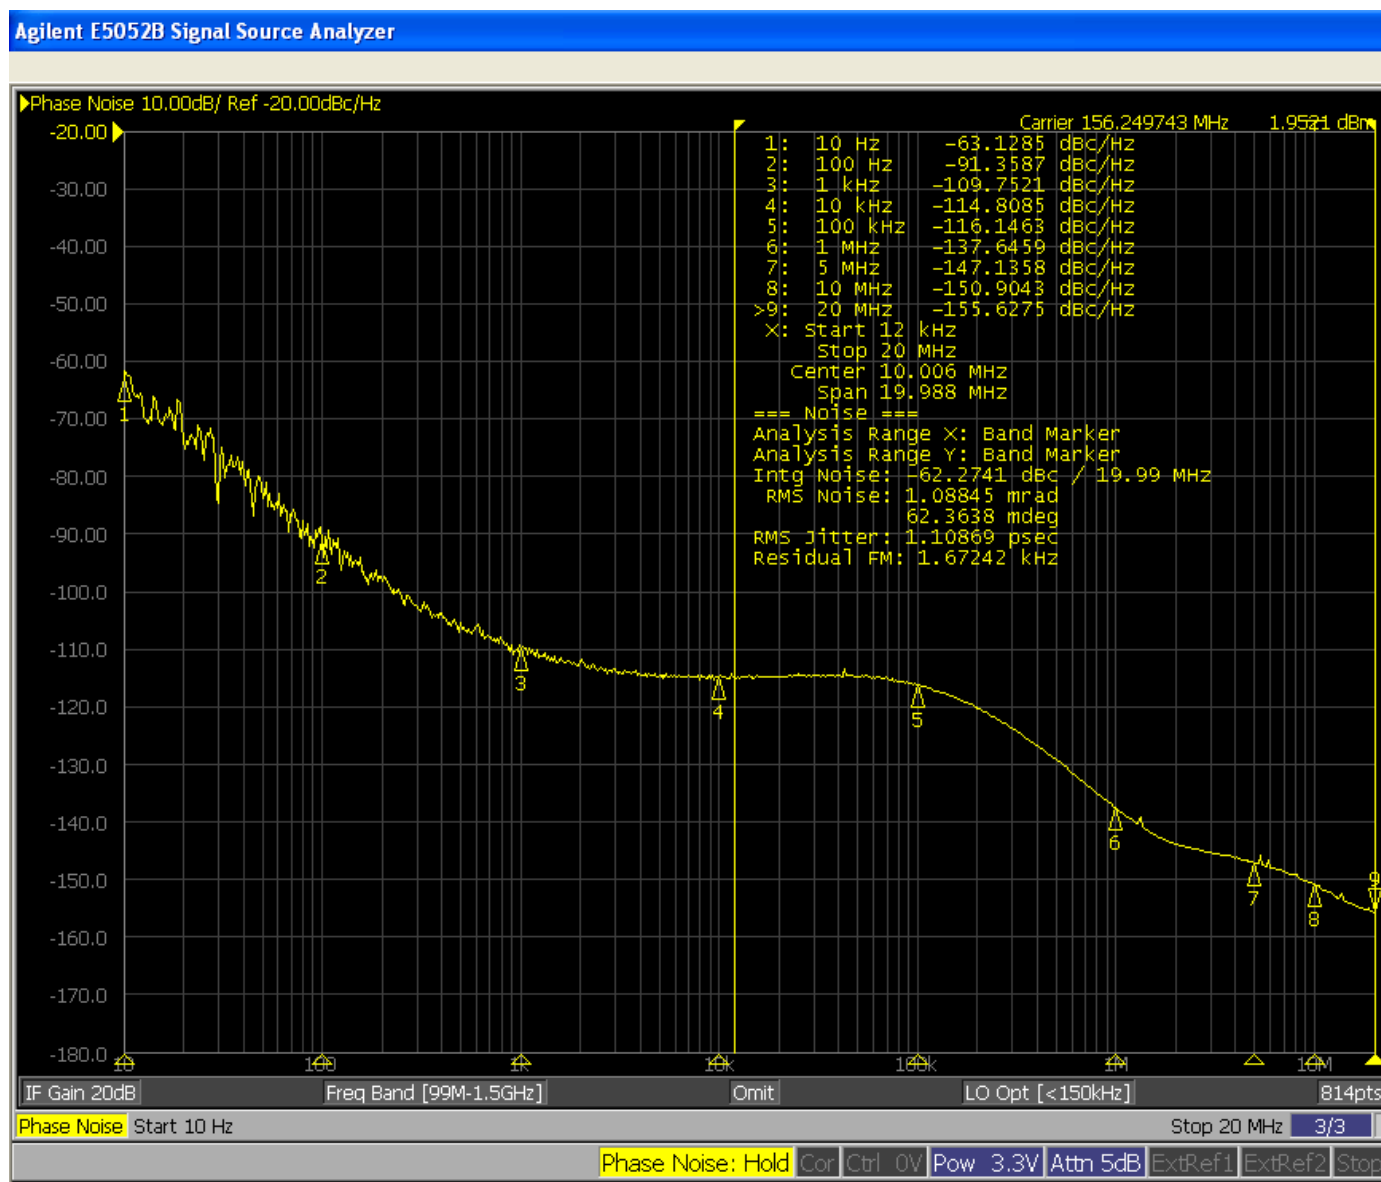


Package Dimensions and Recommended Solder Pad Layout

unit: (mm)


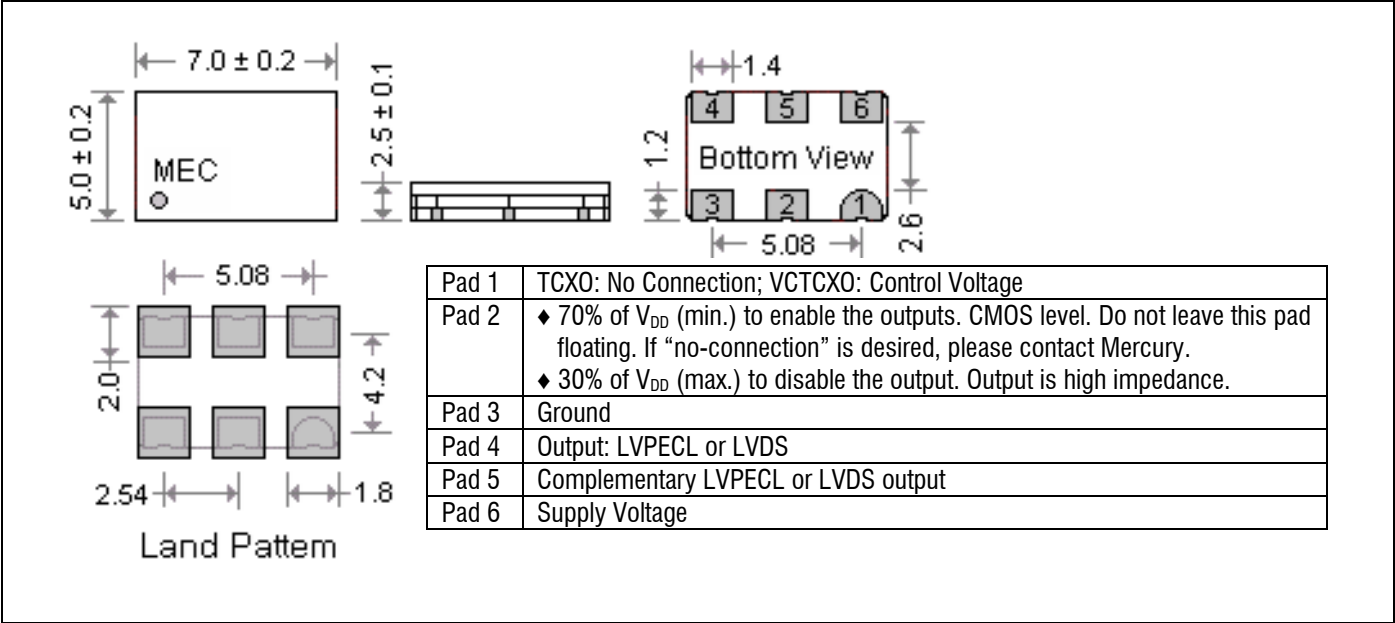


Test Circuits and Output Waveforms


Duty cycle = $\left(\frac{T_1}{T_2}\right) \times 100\%$. Measured at 50% V_{DD}

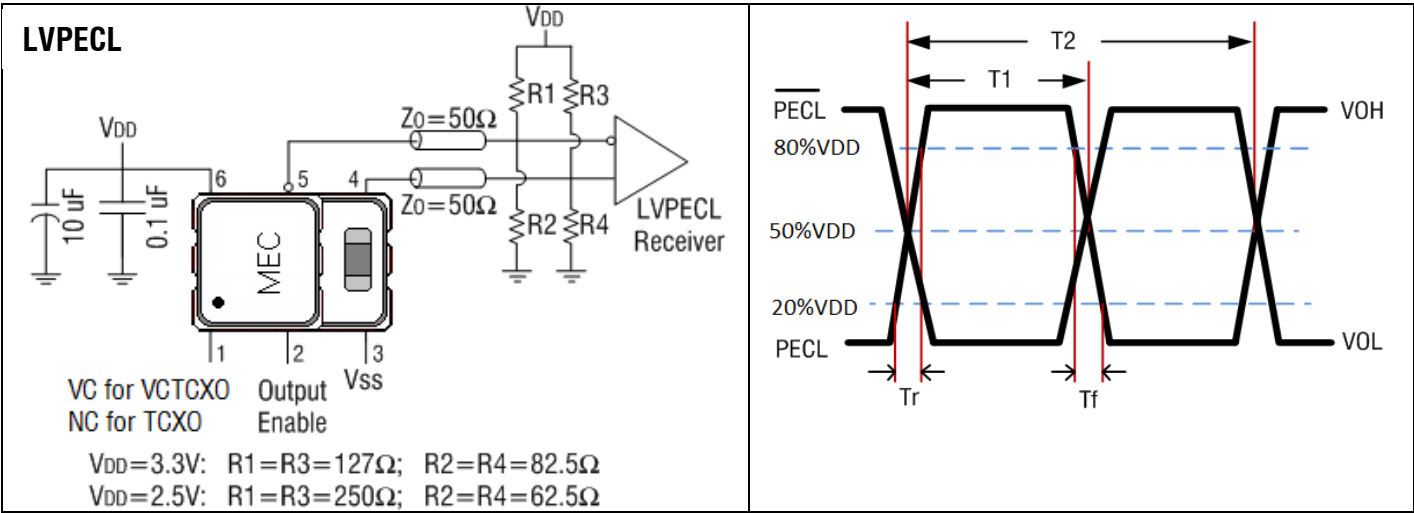

LVDS

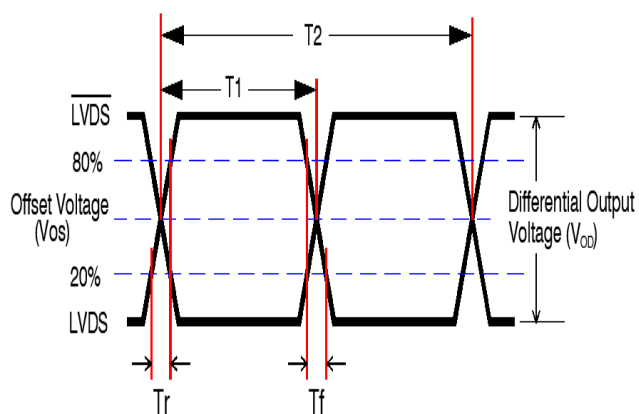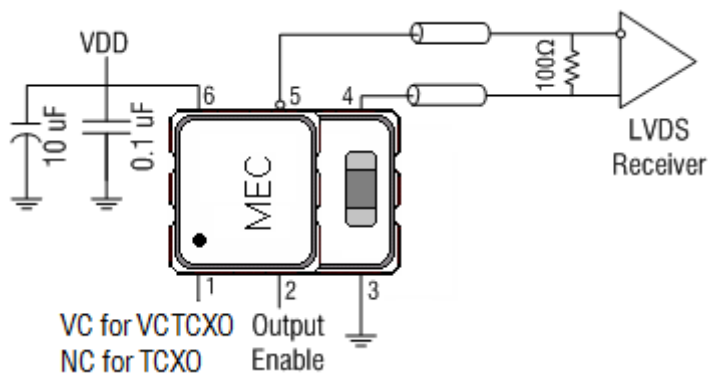

Recommended Solder Reflow Profile (per IPC/JEDEC J-STD-020D.1)

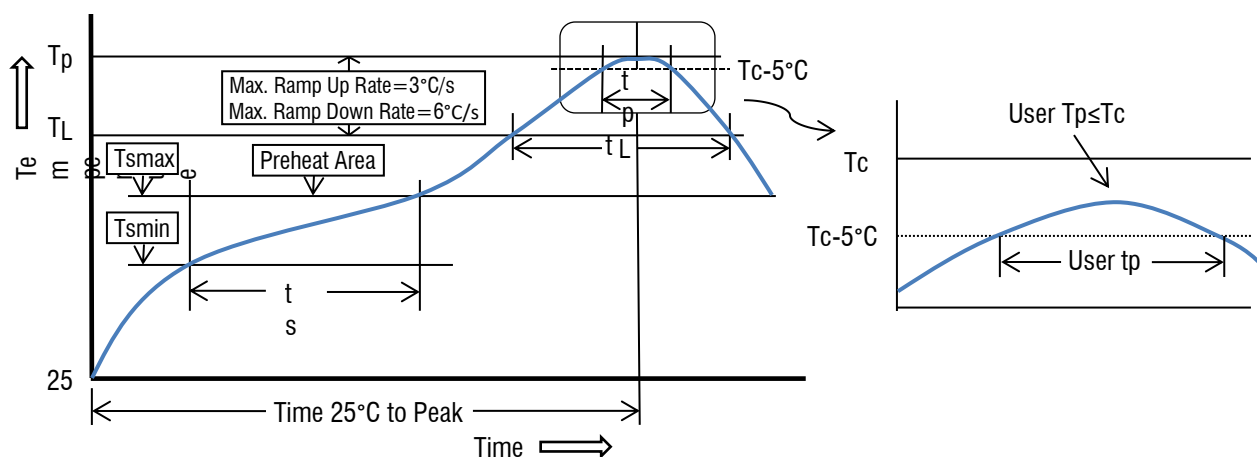

Profile Feature	Sn-Pb Eutectic Assembly	Pb-free Assembly
Preheat/Soak		
- Temperature min. (T_s min.)	100°C	150°C
- Temperature max. (T_s max.)	150°C	200°C
- Time (t_s) (T_s min. to T_s max.)	60 to 120 seconds	60 to 180 seconds
Ramp-up rate (T_L to T_p)	3°C / sec. max.	3°C / sec. max.
Liquidous temperature (T_L)	183°C	217°C
Time (t_L) maintained above T_L	60 to 150 seconds	60 to 150 seconds
Peak package body temperature (T_p)	235°C	260°C
Time (T_p) within 5°C of the classification temperature T_c	10 to 30 seconds	20 to 40 seconds
Ramp-down rate (T_p to T_L)	6°C / second max.	6°C / second max.
Time 25°C to peak temperature	6 minutes max.	8 minutes max.

All temperatures refer to the topside of the package, measured on the package body surface.